




HUTCHINS MANUFACTURING COMPANY

High quality orbital Air Sanders for all phases of surface preparation

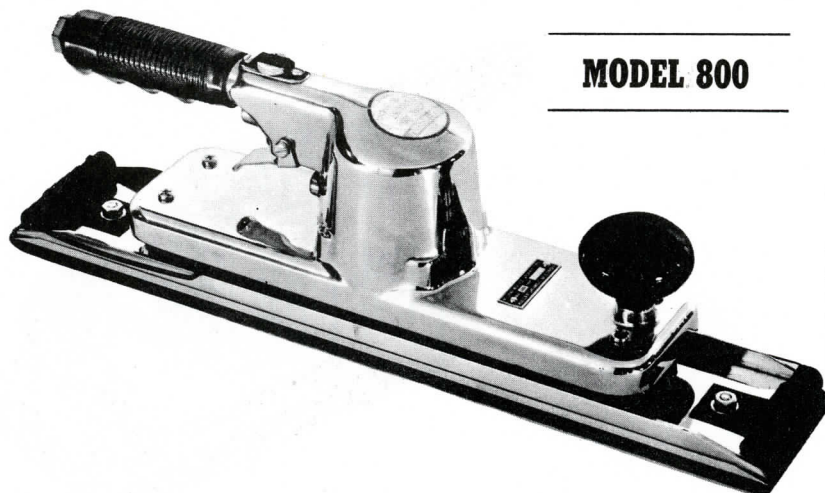

MODEL 800

Orbital-Action Air Sander

The Model 800 sander with orbital action makes a full 200 thousandth cycle, with up to 8000 RPM. Because of this tool's full 44 square inches of flat cutting surface per orbit, it is well adapted for feather edging or full-panel flat sanding. Its dynamic balancing will give you hours of tireless sanding.

Specifications

RPM up to 8000
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size 2 $\frac{3}{4}$ " x 17 $\frac{1}{2}$ "
Backing pad—neoprene sponge
Safely operates up to 150 PSI



MARK VI

Multi-Action Air Sander

This one-hand operated sander will give you a swirl-free finish. This is not a disc sander, but a finishing sander which removes material many times faster and smoother, so the job is ready for the painter in a fraction of the time. Our large 2 $\frac{5}{8}$ " free wheeling drive head assembly is designed for any $\frac{5}{16}$ " x 24" thread. Head assembly also features H.D. double sealed ball bearings, cushioned in rubber to give longer life to bearings and pads.

Specifications

RPM up to 7600
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size—standard round discs
Backing pad—neoprene sponge
Safely operates up to 150 PSI



MARK IV

Orbital-Action Air Sander


The mark IV is powerful, versatile, and dependable. Its whisper quiet action will surely amaze you. Mark IV features one-hand operation, perfect balance, five point suspension, double locking paper clamps which hold even the finest abrasives, and has a built-in air regulator. This tool was designed to eliminate tedious hours of hand sanding, yet say good-bye to noise, vibration and fatigue. Cuts production costs up to one-half.

Specifications

RPM up to 7600
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size 3 $\frac{3}{8}$ " x 9"
Backing pad—neoprene sponge
Safely operates up to 150 PSI

DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620





HUTCHINS MANUFACTURING COMPANY

High quality orbital Air Sanders for all phases of surface preparation


Orbital-Action Air Sander

The Model 900 sander is yet another tool of mechanical superiority, because of the ruggedly designed one piece unitized casting. Designed and built for long and efficient service. Its full 41 square inches of flat sanding area make this tool ideal for block sanding, putty and primer surfaces. This tool features the Hutchins double locking paper clamps.

Specifications

RPM up to 8000
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size 4½" x 11"
Backing pad—neoprene sponge
Safely operates up to 150 PSI

MODEL 900

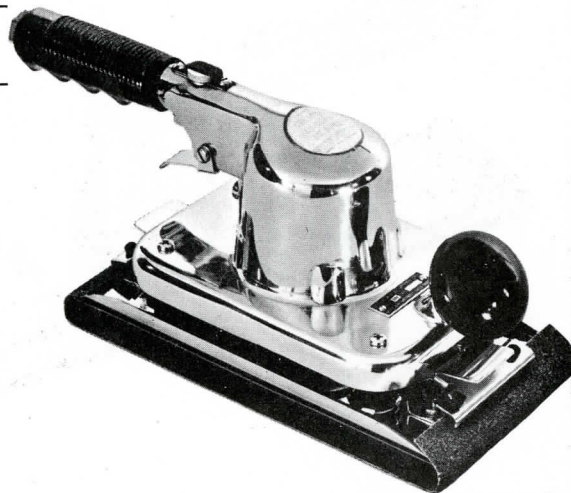


Orbital-Action Air Sander

The mark V is a powerful and dependable tool. This is an ideal sander for block sanding smaller areas. Featuring double locking paper clamps that hold even the finest abrasives securely. One-hand operation is also featured in this tool.

Specifications

RPM up to 7600
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size 4½" x 11"
Backing pad—neoprene sponge
Safely operates up to 150 PSI

MARK V

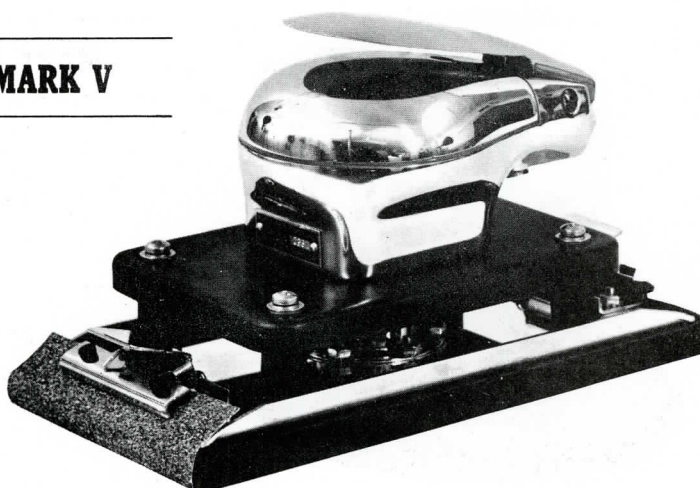

Air Sander with the unique multi-action

Hutchins multi-action provides a totally new concept in material removal establishing a non-directional pattern which eliminates scratches and gouges on your work, which also totally eliminates the need for wet sanding. The multi-action removes material many times faster and smoother than other non-directional sanders. The large 2½" drive head has H.D. double sealed ball bearings in drive assembly, cushioned in rubber to give longer life to bearings and pads. This tool comes complete with both a 5" and a 6" pad.

Specifications


RPM up to 8000
Air pressure 75-150 lbs.
Air consumption from 7.5 CFM
Paper size—standard round discs
Backing pad—neoprene sponge
Safely operates up to 150 PSI

MODEL MA-8



DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620





HUTCHINS MANUFACTURING COMPANY

High quality orbital Air Sanders for all phases of surface preparation

NEW MARK IV DF



Dust Free Orbital-Action Air Sander

The New Mark IV DF (Dust Free) Sander is the most aggressive, quietest sander ever produced by any manufacturer. With the special dust collecting system (world wide patent pending) built into each unit, your abrasive lasts many times longer because it does not load up.

The Mark IV DF is powerful, versatile, and dependable. Its whisper quiet action will surely amaze you. Mark IV DF features one-hand operation, perfect balance, five point suspension, double locking paper clamps which hold even the finest abrasives, and has a built-in air regulator. This tool was designed to eliminate tedious hours of hand sanding, yet say good-bye to noise, vibration and fatigue . . . cuts production costs up to one-half. Uses standard 3 $\frac{1}{2}$ " x 9" abrasive.

NEW MARK V DF



Dust Free Orbital-Action Air Sander

The New Mark V DF (Dust Free) Sander has the same qualities as the Mark IV DF but has a larger sanding pad. No material build up on abrasive due to aggressive vacuum action thru pad.

The Mark V DF is a powerful and dependable tool. This is an ideal sander for block sanding small or large areas. Featuring double locking paper clamps that hold even the finest abrasives securely. One-hand operation is also featured in this tool. Uses standard 4 $\frac{1}{2}$ " x 11" abrasive.

NEW MARK VI DF



Dust Free Multi-Action Air Sander


The New Mark VI DF (Dust Free) 5" or 6" non-directional sanders are more effective than ever. Dust particles are drawn thru pad and abrasive as well as around. No build up on abrasives — many more times the cutting action than any other sander of this type. Sands right up to a molding without fear of damage. Rubber shroud will prevent abrasive damage to moldings.

This one-hand operated sander will give you a swirl-free finish. This is not a disc sander, but a finishing sander which removes material many times faster and smoother due to its clean non-filling action. The job is ready for the painter in a fraction of the time. Head assembly also features H.D. double sealed ball bearings, cushioned in rubber to give longer life to bearings and pads. Uses standard round abrasive discs. Available in 5" or 6" pad size.

Order in 5" or 6" pad size
Mark VI-6 DF: 6" pad
Mark VI-5 DF: 5" pad

DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620





HUTCHINS MANUFACTURING COMPANY

High quality orbital Air Sanders for all phases of surface preparation

High Torque Pneumatic Sander

The finest tool of its kind ever developed for shaping and forming all types of fillers and similar materials. The only new and better way to finish all surfaces, flat, concave and convex areas, without any attachments or adjustments needed. The only new sander of its type that will save you more time and labor, eliminating time consuming hand sanding. A mat finish can be achieved from a rough surface in a fraction of the normal time. This tool effectively sands plastics, polyesters, epoxys, acrylics, lead, wood and all other materials.

Because the SL 1000 A cuts cold, no heat is created. You will eliminate excessive pinholing and lifting of feathered edges of body plastics. This tool is more than just another sander. It's a tool for all industries. Mandrell uses standard 9" x 11" abrasive. Over 92 square inches of aggressive abrasive action.

Specifications

R.P.M. 0-1200 (no load).

Air pressure. 75-150 lbs.


Air consumption approx. 9 C.F.M.

Operates safely up to 150 P.S.I.

Weight approx. 7 lbs.

Overall length 18".

SL 1000 A

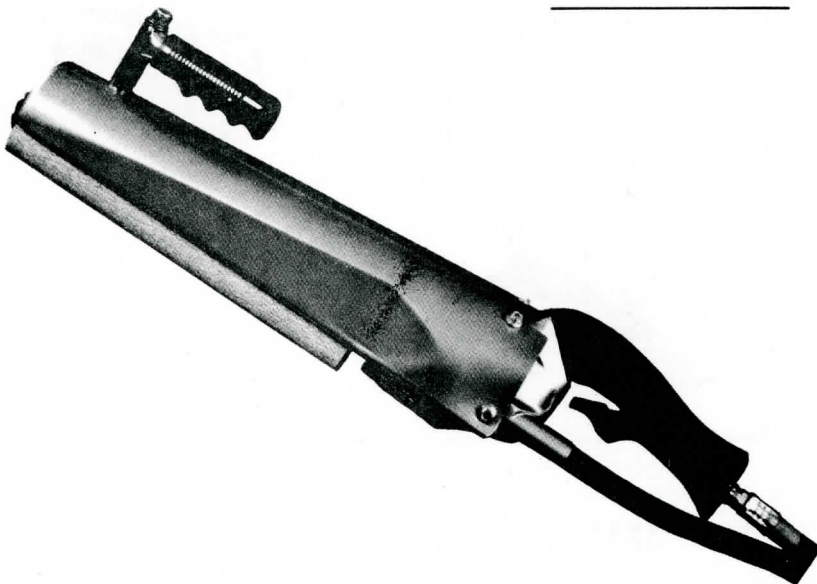

The SL 1000 is the most DUST FREE sander ever developed for shaping and forming all body fillers. Ex: Polyester, epoxy, fiber glass, lead, wood, grain-ing stainless steel, etc.

The SL 1000 is the only sander that can be used for flat, concave and convex surfaces with no extra attachments.

The SL 1000 removes up to 1/2 lb. of plastic material per minute, regardless of age of plastics or other material. You can save up to 90% labor costs per job.

The SL 1000 creates no pin holes and causes no loss of adhesion due to COLD removal of plastics.

The SL 1000 eliminates the time-consuming and costly "cheese grater" way of removing and forming plastic materials.

The SL 1000 completes jobs in a fraction of the normal time due to its incredibly fast material removal.

The SL 1000 cuts plastics green—shop stays clean.

The SL 1000 is approved by U.L. Laboratories for complete safety. Meets all electrical and mechanical safety standards.

The SL 1000 can be used any place where a 110-v electrical outlet is available.

The SL 1000 uses a standard 9" x 11" sheet of abrasive. Over 93 sq. in. of aggressive abrasive used.

The SL 1000 weighs approximately 10 lbs., 110V (220V special), 5 Amp., 1200 RPM (no load).


The SL 1000 is a sander and is not to be used as a grinder.

The SL 1000 removes acrylic paint with no transfer of material to abrasive.

Special U.S. Patents Pending.

Foreign Patents Pending.

SL 1000 E

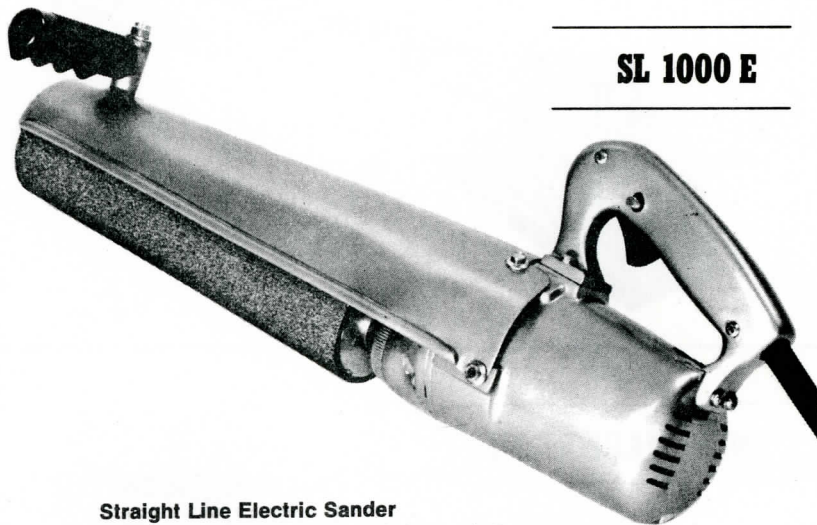

Straight Line Electric Sander

Another first from Hutchins! A revolutionary new concept in sanding. The first absolute STRAIGHT LINE ELECTRIC SANDER, that sands concave, convex and flat surfaces with no attachments or adjustments needed. Uses standard abrasive. Eliminates flying dust. Fast material removal. All this from one tool. If you don't believe it, just ask us to show you. First breakthrough in sanding in 30 years! A tool for all industries. Good news from Hutchins. See Hutchins "Super-Hog" at your local jobbers.

Special U.S. Patents Pending. Foreign Patents Pending.

DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620






HUTCHINS MANUFACTURING COMPANY

MODEL 2000

The New Quality Trouble-free STRAIGHT LINE SANDER

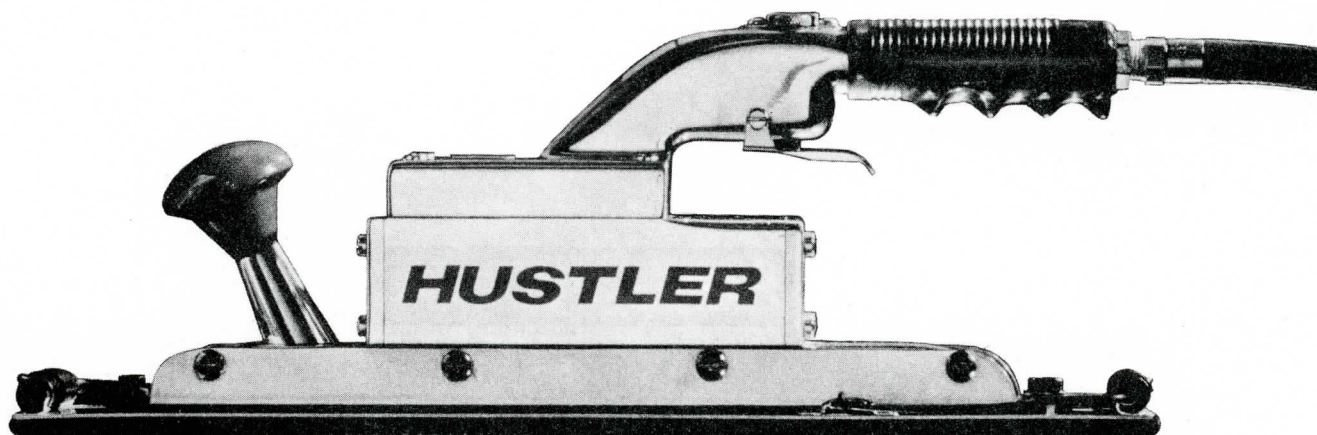

SPECIFICATIONS

AIR PRESSURE RANGE 60 - 140 psi

STROKE 11/16"

STROKES PER MIN. 2660 @ 100 psi

PAPER SIZE: Unit Accepts Two Types of Pads

2 1/4 x 17 1/2" Clamp Type Pad

2 3/4" x 16 1/2" Pressure Sensitive Pad

EFFICIENCY ...

1061 Ft. Per Min. More Sanding Travel Than Standard Straight Line Sanders

DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620



THE OILER

- Adds up to 5 years life to any air tool!
- End pneumatic tool burn-out.
- Stop rust.
- Direct-to-tool oiler.
- Precise oil metering.
- Visible oil supply at mechanic's hand.
- Stem is aircraft quality aluminum — precisely machined to fit standard 1/4" pipe thread.
- No airline oil contamination.
- A must in single-line shops.




**A SMALL PRICE TO PAY
FOR POSITIVE PROTECTION
OF EXPENSIVE
PNEUMATIC TOOLS!**

FITS ALL PNEUMATIC TOOLS



AIR HAMMER

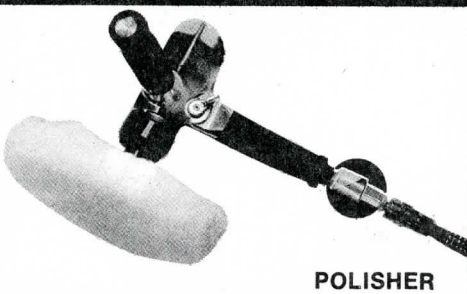


POLISHER



SANDER-GRINDER



SANDER-FILER

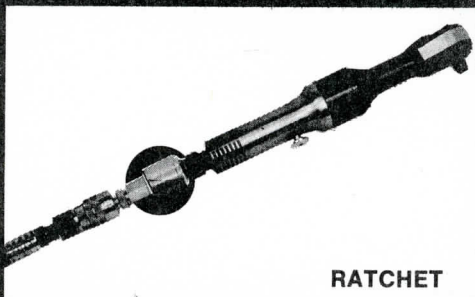

RATCHET

Air Drill,
Tire Studder,
Oscillating Sander,
Orbital Sander,
Air Screw Driver,
etc.

Individually
Skin Packed.



DETROIT AUTOBODY EQUIPMENT INC.
BOX 717, ROYAL OAK, MI. 48068 • (313) 585-4620



THE OFFER

- A full range of products to meet your needs
- Quality products at competitive prices
- Fast delivery
- Expert advice and support
- A range of services to complement our products
- A commitment to customer satisfaction
- A team of experienced professionals

A SMALL BUSINESS
FOR POSITIVE RESULTS
OR EXPANSION
A FLEXIBLE SOLUTION

ITS ALL ABOUT THE TOOLS



THE OFFER IS A COMMITMENT TO EXCELLENCE
AND A DEDICATION TO CUSTOMER SATISFACTION